Blue-White®

VARIABLE AREA FLOW METERS

Choose the FLOW METER Capabilities Your Application Requires:

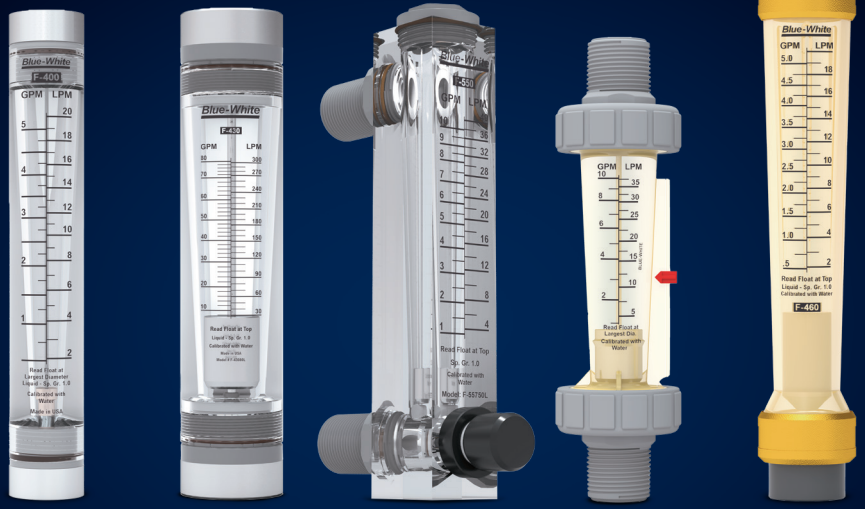

	F-400	F-430	F-550	F-440	F-460
Acrylic meter body	✓	✓	✓	■	■
Polysulfone meter body to resist high temps and pressure	■	■	■	✓	✓
Durable, highly polished, one-piece meter body	✓	✓	✓	✓	✓
Annealed for added strength	✓	✓	✓	■	■
Acceptable in direct sunlight	✓	✓	✓	■	■
Direct reading permanent scale	✓	✓	✓	✓	✓
White back reflector for easy reading	✓	✓	✓	■	■
316 stainless floats and guide rods	✓	✓	✓	■	■
PTFE float and float guides available	■	■	✓	✓	✓
Optional PVC or PVDF Adapters for corrosive applications	■	■	■	■	✓
Rib guided float	■	■	■	■	✓
Bulkhead nuts attached directly to the inside panel	■	■	✓	■	■
Optional adjustable flow	■	■	✓	■	■
Used in UltraPure Applications	■	■	■	■	✓
No metal in the fluid path	■	■	■	■	✓
Compact size for tight installations	■	■	■	✓	■
Union connections for easy installation and maintenance	■	■	■	✓	■
Adjustable flow rate setpoint indicator	■	■	■	✓	■

Learn more about the
Variable Area Flow Meters *at* www.blue-white.com

Made in USA